


## SOPRASOLIN A 30

Texself Color is a self-adhesive waterproofing tape that offers high tear resistance. Made of a reinforcement laminated onto an aluminium sheet and coated with an elastomeric bitumen. The adhesive surface is protected with a removable release film.

### ADVANTAGES

- High tear and puncturing resistance
- Waterproof
- Self-adhesive
- Easy to install
- Flexible
- Nice looking
- Sustainable.

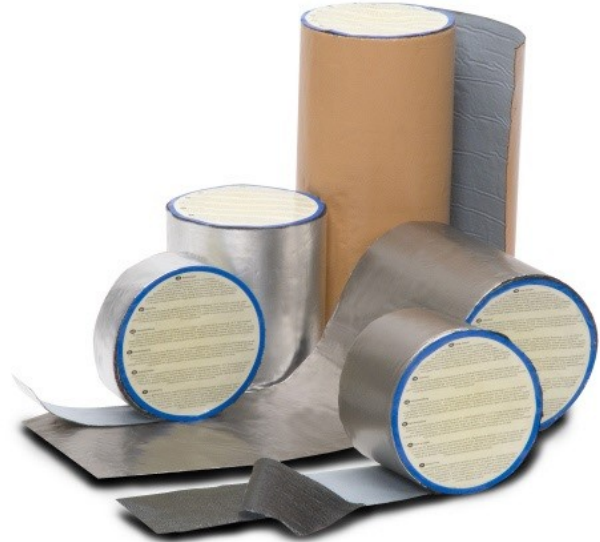

### APPLICATION

TEXSELF can be applied easily to most of the materials: wood, concrete, fibre cement, zinc, PVC. It is excellent for waterproofing detailing, skylights, eaves, chimneys, and for protection of the insulation. It can also be used for repairing tiles, slate, roof channels and cracks in the walls or in the waterproofing.

### REGULATIONS

- Quality System in accordance with ISO:9001

### Auxiliary Bituminous Waterproofing

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

## INSTALLATION

1. Brush and dry the application surface.
2. On uneven or porous surfaces, apply a layer of EMUFAL I with a brush or roller (0.4-0.8l/m<sup>2</sup>).
3. Drying time 1 hour.
4. Unroll, assess, and cut the tape.
5. After removing the first 30 cm of membrane (release), place the tape on the application surface, remove the sheet completely, adhere and press down firmly.

## PRECAUTIONS

The product does not contain any substance that is harmful to health or to the environment and it complies with the general Health and Safety requirements. For more information, please consult the safety fact sheet for the product.

## Auxiliary Bituminous Waterproofing

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

## Auxiliary Bituminous Waterproofing

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.