


## TEXSALON WALKWAY

Synthetic polyolefin-modified TPO membrane, obtained by coextrusion, reinforced with a polyester mesh.

The membrane has an upper, anti-slip surface

### ADVANTAGES

- Upper surface is embossed
- Excellent weldability
- Mechanical resistance and puncturing resistance
- Weathering and UV radiation resistant
- Puncturing resistant.

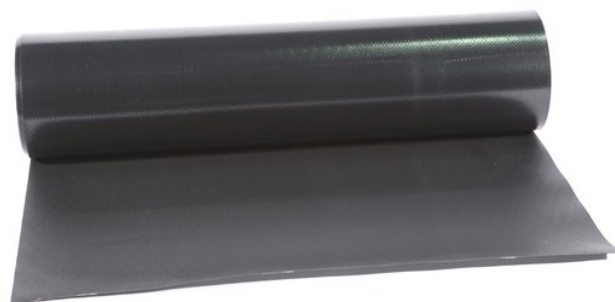

### APPLICATION

#### ROOFS

- Protective layer for walkways on exposed roofs with TPO membranes

## Synthetic Waterproofing TPO

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

## PACKAGING AND STORAGE

	TEXSALON WALKWAY
Roll length (m)	20
Roll width (m)	1.00
m <sup>2</sup> /roll	20
m <sup>2</sup> /pallet	460
Colour	Black

Storage: Horizontally, parallel (never crossed) Store in the original packaging in a dry and cool place

## TECHNICAL PROPERTIES

PROPERTIES	Unit	Test Method	TEXSALON WALKWAY
Thickness	mm	EN 1849-2	1.8
Weight	Kg/m <sup>2</sup>	EN 1849-2	1.68
Tensile strength	N/ 5cm	EN 12311-2	≥ 1100
Elongation to break	%	EN 12311-2	≥ 15
Resistance to impact	mm	EN 12691	≥ 800
Cold bending	°C	EN 495-5	≤ - 40
Hydrostatic pressure resistance ( 6 hours at 0.5 Mpa)		EN 1928 (B)	Waterproofing
Dimensional stability	%	EN 1107-2	≤ 0.5
Resistance to artificial weathering	U.V.	EN 1297	No surface cracking

## Synthetic Waterproofing TPO

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.